



**HINO**

A Toyota Group Company

**300**



# THE HINO 300

— SOUTH AFRICA'S #1 URBAN TRANSPORT SOLUTION FOR MEDIUM-SIZED CARGO

» LOOKING FOR A HARD WORKING, INTER-CITY COURIER? THEN TAKE A LOOK AT THE HINO 300 RANGE.

The Hino 300 is an ideal transport solution with an approximate body and payload allowance of between 3390 and 5950 kgs. Rugged and reliable, there is no question that the Hino 300 will get your goods safely to their destination. No nonsense and backed by Hino's tried and tested technology, the Hino 300 is perfect for regional haul, express and overnight deliveries as well as the transport of refrigerated cargo. Hino 300 has been the market leader for the last 10 years in the MCV segment.

## NEW LOOK+ FRONT GRILLE

Smart, modern design with strong styling and aerodynamic efficiency.



## ENGINE+

Low emissions with a Euro 3 rating provide uncompromised power and fuel economy.



## WHEELS+ AND TYRES

Now standard with tubeless tyres to offer longer tyre life and improved safety margins.

## HINO 300 SERIES

- 614 SWB
- 614 LWB
- 714 SWB
- 714 LWB
- 814 LWB
- 815 LWB Auto
- 815 Crew Cab Auto
- 915 LWB




## + CAB DESIGN

The cab\* has been completely redesigned for driver comfort, utility and ease of entry and exit.


## + REAR DIFFERENTIAL

The enhanced differential is built to handle long and tough hauls.

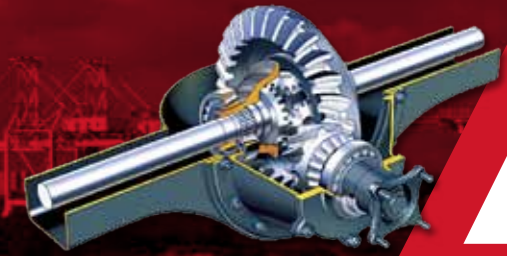

## + AUTO GEARBOX

The 815 LWB and 815 Crew Cab derivatives feature a 6-speed automatic transmission which reduces driver fatigue and operating costs all while lowering the emissions level and reducing clutch wear and tear.

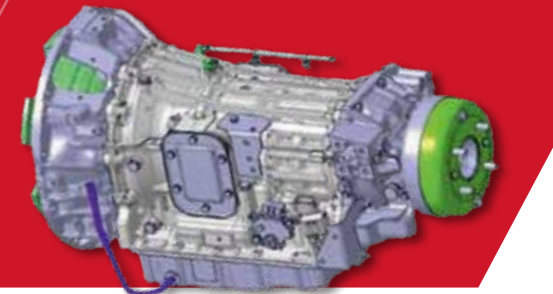

\* Please note that the Hino 300 cab is only available in white

# THE HINO 300

» THE HINO 300 HAS BEEN BUILT WITH THE DRIVER IN MIND. THE CAB IS SPACIOUS WITH PLENTY OF HEADSPACE, LEGROOM AND IN-CAB STORAGE

The dashboard has been ergonomically designed to be easy to use. Air conditioning keeps your driver and passenger cool and alert. Reduced vibrations from the steering wheel reduce driver stress. In addition to driver comfort, safety is also a key priority. The Hino 300 series has airbags and ABS standard across the range as well as side impact beams, and an improved front suspension that keeps the cab more stable and comfortable for the driver.

## ALSO AVAILABLE + IN CREW CAB

Comfortably transports four passengers and an impressive load of cargo.



## STANDARD SAFETY + FEATURES

Safety is considered from every angle with a reinforced steel cab, driver and passenger airbags with seatbelt indicator light and warning buzzer. The Hino 300 is also equipped with an anti-theft system and thinner front pillars for an uninterrupted view.



## STANDARD RADIO +

AM/FM radio and CD player.



## + AIR CONDITIONER

Keeps the driver cool and alert improving both driver and vehicle safety.

## + MULTI-FUNCTION DISPLAY

A Multi-Function Display showing two independent trip distances, current and average fuel consumption and display settings.




## + COLLAPSIBLE GEAR LEVER

A simple innovation that enhances the driver's freedom of movement in the cab.

## + DRUM BRAKES

Auto-adjusting drum brakes provide optimum braking capability, whilst ensuring low operating and maintenance costs.



## + ABS (ANTI-LOCK BRAKING SYSTEM)


Maximises driver control during emergency braking across all road surface conditions.



# SPECIFICATIONS+

<https://truckmanualshub.com/>

		Hino 300 614 SWB	Hino 300 614 LWB	Hino 300 714 SWB	Hino 300 714 LWB	Hino 300 814 LWB	Hino 300 815 LWB Auto	Hino 300 815 Auto Crew Cab	Hino 300 915 LWB	
Dimensions (mm)	BBC - Rear Structure	1560	1560	1670	1670	1670	1670	2680	1670	
	CA - Cab to Axle	1945	2820	2870	3310	3310	3640	2630	3640	
	CH - Cab Height	2115	2110	2220	2220	2220	2215	2235	2235	
	CW - Cab Width (Excl. Mirrors)	1695	1695	1995	1995	1995	1995	1995	1995	
	FH - Frame Height Rear Axle	705	705	785	785	795	795	795	805	
	FOH - Front Overhang	980	980	1110	1110	1110	1110	1110	1110	
	FT - Front Track	1400	1400	1655	1655	1655	1655	1655	1655	
	FW - Frame Width (Outside)	700	700	750	750	750	750	750	750	
	Max. Homologated Body Width (Min-Max)	1870 - 2100	1870 - 2100	1995 - 2500	1995 - 2500	1995 - 2500	1995 - 2500	1995 - 2500	1995 - 2500	2055 - 2500
	MGC - Minimum Ground Clearance	195	195	210	210	215	215	210	200	
	OL - Overall Length	4710	5965	6120	6735	6735	7245	7245	7250	
	OVH - Overall Vehicle Height	2115	2110	2220	2220	2220	2215	2235	2235	
	ROH - Rear Overhang	1135	1555	1580	1760	1760	1940	1940	1940	
	RT - Rear Track	1435	1435	1520	1520	1520	1520	1520	1590	
	WARW - Width Across Rear Wheels	1870	1870	1985	1985	1985	1985	1985	2055	
	WB - Wheel Base Std	2525	3400	3430	3870	3870	4200	4200	4200	
	WB - Wheel Base (Min-Max)	2525 - 3800	2525 - 3800	3430 - 4600	3430 - 4600	3430 - 4800	4200 - 5200	4200 - 5200	4200 - 5200	

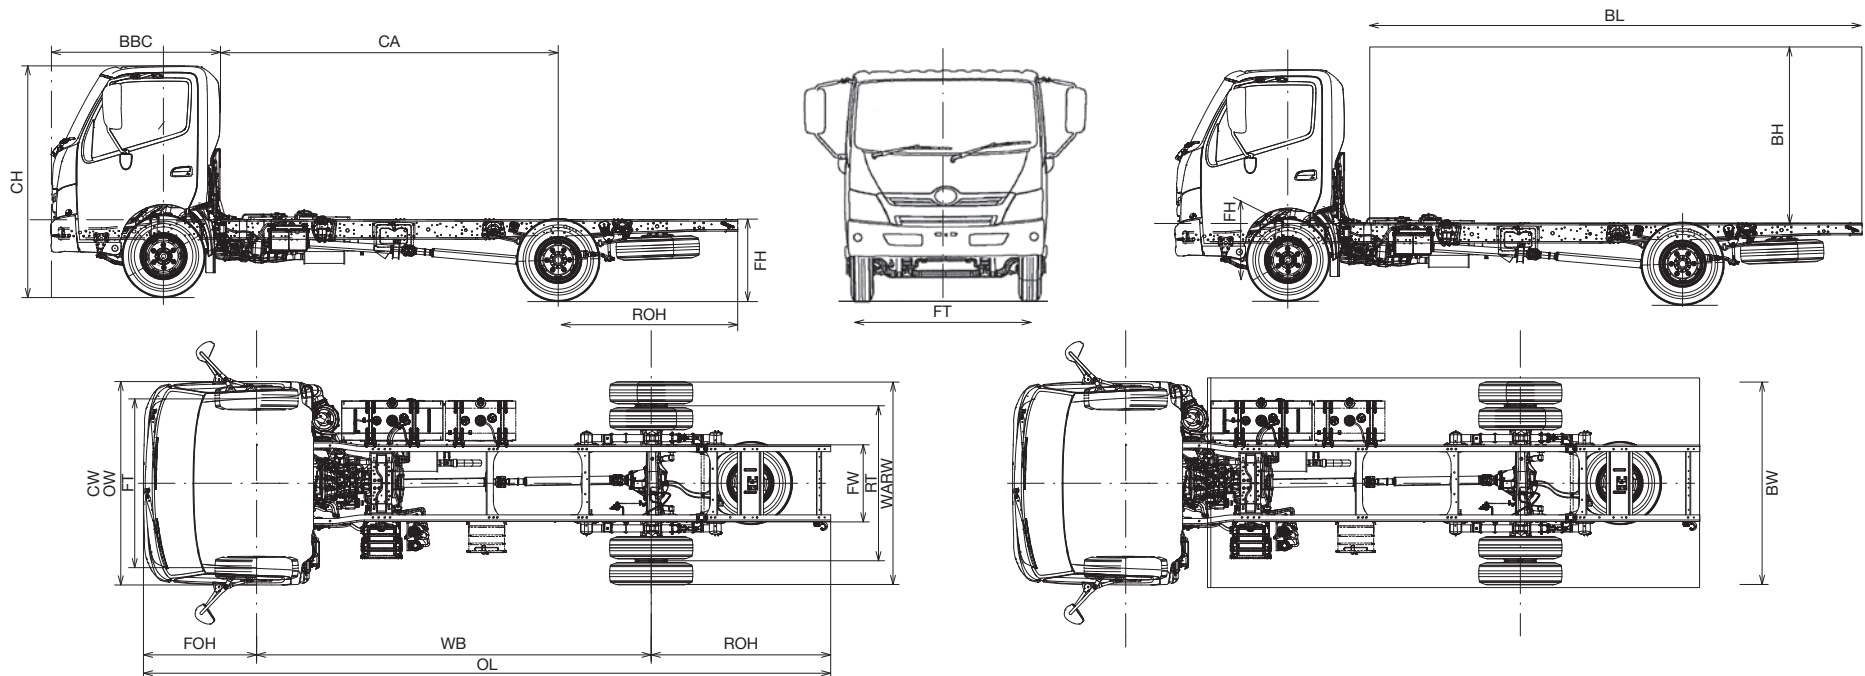



		Hino 300 614 SWB	Hino 300 614 LWB	Hino 300 714 SWB	Hino 300 714 LWB	Hino 300 814 LWB	Hino 300 815 LWB Auto	Hino 300 815 Auto Crew Cab	Hino 300 915 LWB
	Brake system: Front	Disc	Disc	Drum	Drum	Drum	Drum	Drum	Drum
	Brake system: Rear	Drum	Drum	Drum	Drum	Drum	Drum	Drum	Drum
	Dual Circuit	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	LSP Valve on Rear Axle	Not Fitted	Not Fitted	Not Fitted	Not Fitted	Not Fitted	Not Fitted	Not Fitted	Not Fitted
	Type	Vacuum Servo Hydraulic	Vacuum Servo Hydraulic	Vacuum Servo Hydraulic	Vacuum Servo Hydraulic	Vacuum Servo Hydraulic	Vacuum Servo Hydraulic	Vacuum Servo Hydraulic	Vacuum Servo Hydraulic
Parking Brake	Type	Rear of Transmission	Rear of Transmission	Rear of Transmission	Rear of Transmission	Rear of Transmission	Rear of Transmission	Rear of Transmission	Rear of Transmission
Steering	Ratio	22.6:1	22.6:1	20.9:1	20.9:1	20.9:1	20.9:1	20.9:1	20.9:1
	Steering Column	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic
	Turning Radius between Kerbs: (mm)	5500	7200	6200	6900	6900	7400	7400	7400
	Turning Radius between Walls: (mm)	6000	7700	6900	7600	7600	8100	8100	8100
	Type	Recirculating Ball	Recirculating Ball	Recirculating Ball	Recirculating Ball	Recirculating Ball	Recirculating Ball	Recirculating Ball	Recirculating Ball
Transmission	Synchromesh or Automatic	Synchromesh	Synchromesh	Synchromesh	Synchromesh	Synchromesh	Automatic	Automatic	Synchromesh
	Gear Ratio 1-top gear:	4.981 - 0.738	4.981 - 0.738	4.981 - 0.738	4.981 - 0.738	4.981 - 0.738	3.742 - 0.634	3.742 - 0.634	5.979 - 0.759
	Gearshift Operation	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Automatic	Automatic	Mechanical
	Make	Hino	Hino	Hino	Hino	Hino	Hino	Hino	Hino
	Model	M550	M550	M550	M550	M550	A860E	A860E	MYY6S
	Number of forward Gears	5	5	5	5	5	6	6	6
	Reverse Ratio	4.625	4.625	4.625	4.625	4.625	3.697	3.697	5.701
Wheels & Tyres	Attachment	5 Stud Disc Wheel	5 Stud Disc Wheel	6 Stud Disc Wheel	6 Stud Disc Wheel	6 Stud Disc Wheel	6 Stud Disc Wheel	6 Stud Disc Wheel	6 Stud Disc Wheel
	Number of Wheels including Spare	7	7	7	7	7	7	7	7
	Spare Wheel Carrier Location	Rear Chassis	Rear Chassis	Rear Chassis	Rear Chassis	Rear Chassis	Rear Chassis	Rear Chassis	Rear Chassis
	Tyre Construction	Tubeless	Tubeless	Tubeless	Tubeless	Tubeless	Tubeless	Tubeless	Tubeless
	Tyre Size	205/75R16C	205/75R16C	215/75R17.5	215/75R17.5	215/75R17.5	215/75R17.5	215/75R17.5	215/75R17.5
	Load/Speed Rating	113/111	113/111	126/124	126/124	126/124	126/124	126/124	126/124
	Wheel Size	16 x 5.50	16 x 5.50	17.5 x 6.00	17.5 x 6.00	17.5 x 6.00	17.5 x 6.00	17.5 x 6.00	17.5 x 6.00
	Wheel Type	Single Piece Steel	Single Piece Steel	Single Piece Steel	Single Piece Steel	Single Piece Steel	Single Piece Steel	Single Piece Steel	Single Piece Steel
Fuel Tank	Capacity (ℓ)	80	100	100	100	100	100	100	100
Safety & Security	Airbags	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger
	Seatbelt Pre-Tensioner	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger
	Transponder Key Immobiliser	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Side Impact Beams	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Microdot Vehicle Identification	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Comfort & Convenience	Air Conditioner	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Key Activated Central Locking	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Electric Windows	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger	Driver and Passenger
	Radio/CD Player	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Storage Facilities	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
After-sales	Service Intervals*	20 000 kms	20 000 kms	20 000 kms	20 000 kms	20 000 kms	20 000 kms	20 000 kms	20 000 kms
	Warranty Period	24 Months Unlimited kms	24 Months Unlimited kms	24 Months Unlimited kms	24 Months Unlimited kms	24 Months Unlimited kms	24 Months Unlimited kms	24 Months Unlimited kms	24 Months Unlimited kms

**\*Service Intervals**

20 000 kms dependent on application and operating conditions

# HINO VALUE ADDED SERVICES

## – HOW HINO GOES THE DISTANCE FOR ITS CUSTOMERS

While Hino is renowned for its exceptional quality, durability and reliability, peace of mind is also part of Hino's customer-focused and service heritage. HinoCare provides comprehensive support and service from warranties to spare parts replacement to roadside assistance.

### + TOWING ASSISTANCE

- Recovery towing services to the nearest Hino Dealer for repairs or to a safe location

### + WARRANTY PERIOD

- 300 Series – 24 months, unlimited kms

### + SERVICE INTERVALS

- 300 Series – 20 000 kms\*
- \* Dependent on application and operating conditions.
- Speak to your Hino dealer for more information.



### + 24 HOUR ROADSIDE ASSISTANCE

- Hino dealer service and parts assistance
- Hino's Dealer Network is more than 50 strong in Southern Africa
- 24-hour call centre 0800 878 257 (0800 TRUCKS)
- Technically-trained staff for breakdown assistance
- Roadside security – In the event that your vehicle breaks down in an unsafe area
- Medical assistance

### MAINTENANCE AND SERVICE PLANS +

- These can be tailor-made to your requirements
- Speak to your Hino dealer for more information.



Date: 03/2012 Part no. Hino300BL  
Waste Tyre Reg No. TPREG0031GAU

---

Certain vehicle details and specifications contained in this brochure may differ from the available models. Hino Motors limited and Hino South Africa reserves the right to alter any details of specifications and equipment without notice. For the most current information on prices and specifications, as well as comprehensive information about products offered by Hino, contact your dealer, or Hino South Africa. Call 0800 139 111 or visit [www.hino.co.za](http://www.hino.co.za)